

REC TWINPEAK 2S 72 PACKAGING INFORMATION

These packaging specifications are applicable to the following products:

REC TwinPeak 2S 72 Series

REC TwinPeak 2S 72 XV Series

REC TwinPeak 2S 72 XV Bifacial Series

REC TwinPeak 2S Mono 72 XV Series


PALLET HANDLING



PALLET FRONT VIEW (DOUBLE STACK)



PANEL IDENTIFICATION

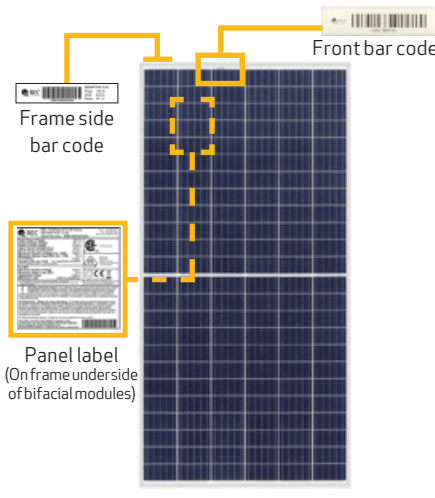

PALLET SHIPMENT DIMENSIONS

Length of pallet:	2052 mm (81 in)
Width of pallet:	1055 mm (42 in)
Height of single pallet stack:	1220 mm (48 in)
Height of double pallet stack:	2440 mm (96 in)
Pallet weight:	53 kg (117 lbs)
Stack weight (pallet + panels):	ca. 790 kg (1750 lbs)

DELIVERY INFORMATION

Panels per pallet:	33
Panels per GP/high cube container (40 ft):	726 (22 pallets)
Panels per 13.6 m truck:	858 (26 pallets)
Panels per 53 ft truck:	825 (25 pallets) (per US road weight restrictions)


DELIVERY DOCUMENTATION

Flash data list:	On short side
Serial number list:	On short side
Product name:	On long side
Watt class:	On long side

PALLET SIDE VIEW (DOUBLE STACK)



PACKAGING DOCUMENTATION

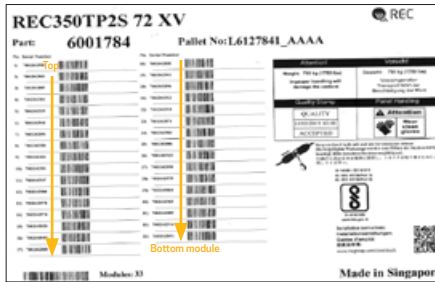

- Pallet No. 1 is the top module in a stack
- Pallet No. 33 is the lowest module in a stack
- Pallet documentation shows:
 - Module serial number
 - Module bar code
 - Manufacturing date
 - Electrical data (I_{SC} , I_{MP} , V_{OC} , V_{MP} , P_{MP} , Fill Factor)

PACKAGING MATERIAL

Pallet:	Wood
Foam pad:	Polyurethane Polyether Polyol
Top cover:	Corrugated cardboard
Edge protectors:	Core board - Kraft
Corner pieces and spacers:	HDPE

Note: Pallet documentation envelope contains 2 x tools for simple connector release.

STORAGE AND TRANSPORTATION

Stacking for storage:	2 pallets max
Stacking for transportation:	2 pallets max

Note: When double stacking pallets, ensure the upper pallet sits securely on the edge protector to avoid damage to the lower pallet during transportation or handling.

Note: Pallets delivered stacked are not bound together.

PALLET STACKING



QUALITY

REC performs a quality check on all pallets before and during loading. Vehicles will only be loaded if they are deemed safe and serviceable. During transportation, the pallets are stably loaded in protected containers with air bags inbetween to secure them in position. The freight company and driver are responsible for ensuring suitable load safety for each delivery vehicle. Vehicles without suitable load safety measures will not be loaded. Loading without the use of air bags or loading belts to secure the pallets may lead to damage to the pallet(s) and/or module(s) during transportation which may invalidate the warranty. If using loading belts to secure pallets, ensure these are correctly fitted as over-tightening may cause damage to the modules or pallet(s). REC makes every effort to ensure environmentally-friendly packaging materials are used. Please recycle whenever possible.

MINIMUM FORK LENGTHS FOR TRANSPORTATION

		Single/Double stack only
Forklift	Long side	1.2 m (47 in) Loading & unloading of container only
	Short side	1.8 m (71 in)
Pallet jack	Long side	X
	Short side	1.8 m (71 in)

Note: Forks must be spaced a minimum of 500 mm apart. Handlers must ensure that vehicles used for REC pallets can handle the specified load safely.

Note: Specifications subject to change without notice